


### 0.0175 m<sup>3</sup> Test Element

- ▶ Test element for testing the installation density for blown-in mineral fibre cavity wall insulation according to EN 14064-2, annex C.
- ▶ Removable front panel for checking the installed insulation
- ▶ Practical locking device for quick emptying
- ▶ Increased stability thanks to an enlarged base.
- ▶ Handle for easy transport and handling.
- ▶ Robust multiplex material and reinforced metal rear wall opposite the injection hole.



Injection nozzle






Injection nozzle with ball valve




Opening the test element and inspecting the filling results.



Quality control with the digital scales

Image	Description	Prod. no.
	NW50>24 injection nozzle	3961
	NW50>24 injection nozzle with ball valve	5692
	Digital scales for the testing basket	4544

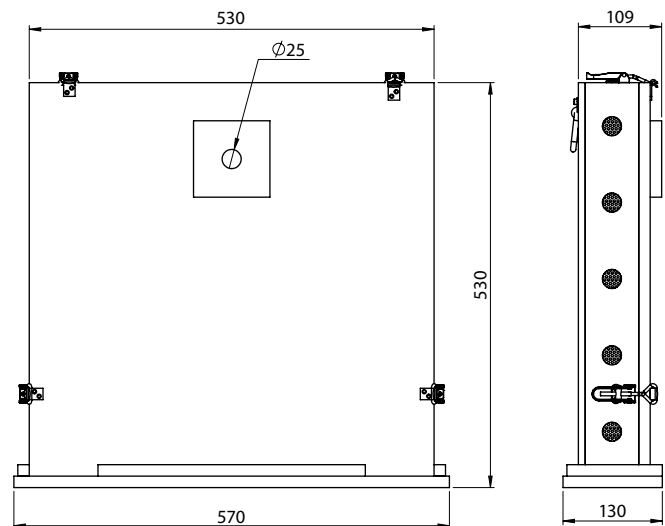

#### Technical Data

Product no. 5697

Test volume: 0.0175 m<sup>3</sup>

W × D × H = 570 × 130 × 530 mm

Weight: approx. 8 kg