



Spray head, Inline/adhesive NW50>24

Spray head with inline nozzle for injection and adhesion of EPS granules. A complete wetting of the EPS beads enables a permanent solidification of the hollow layers insulation after the adhesive has been hardened. Settlements, material trickling out through gaps and cracks or subsequent changes can therefore not occur. The thin-walled nozzle pipe with its special shaped outlet enables a high processing speed at a relatively small bore diameter.

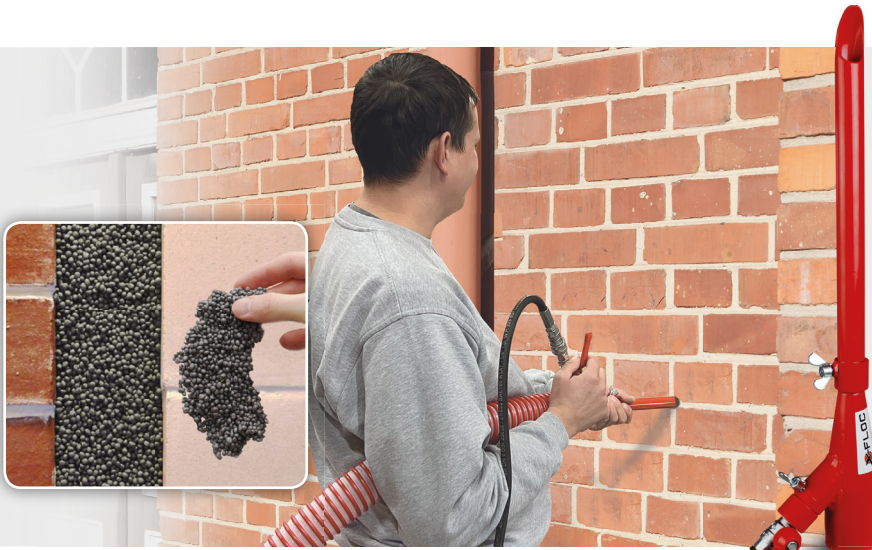

Product details

- ▶ Hose connection for insulation material: NW50 (2")
- ▶ Nozzle pipe: outer diameter D=24mm, insertion depth
- ▶ approx. 260mm, spoon shaped outlet
- ▶ Easy to change nozzle pipe insert
- ▶ Connection for liquid adhesive: single-lever coupling (1/4")
- ▶ with shut-off valve (max. pressure 20bar)
- ▶ Material throughput: approx. 0,25l/min. at 10ba
- ▶ Weight: approx. 0,95kg

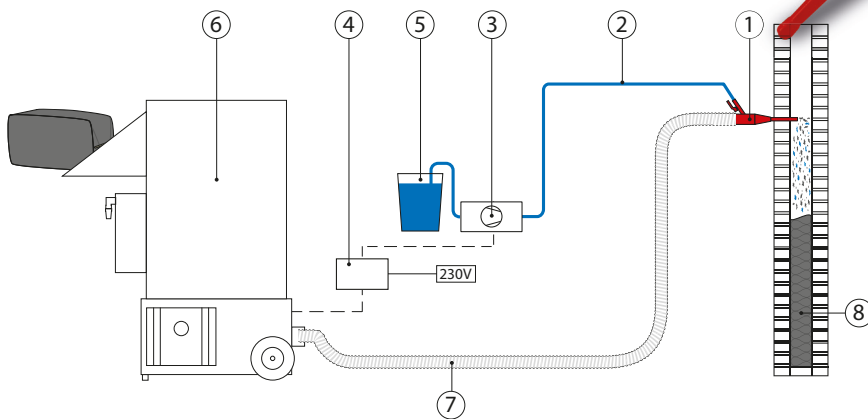

- ⑥ Insulation Blowing Machine
- ⑦ Conveyor- or Injection Hoses
- ⑧ Element

| Nr. | Anzahl | Artikel | | Art.-Nr. |
|-----|--------|--|--|-------------------|
| ① | 1x | Spray head, Inline / adhesive- NW50>24 | | 7881 / 8120 |
| ② | 1x | High pressure hoses 9 mm/1/4" (L=15 m, 30 m oder 50 m) | | 715 / 5054 / 5055 |
| ③ | 1x | Diaphragm pump | | 206 / 10840 |
| ④ | 1x | Master-Slave Control 24V= / 230V~ | | 1057 |
| ⑤ | 1x | Adhesive XF10 for gluing EPS granules | | 7976 |