


# Sealing caps for injection holes

The sealing corks and plugs facilitates fast and easy closing of injection holes.


## Sealing cork



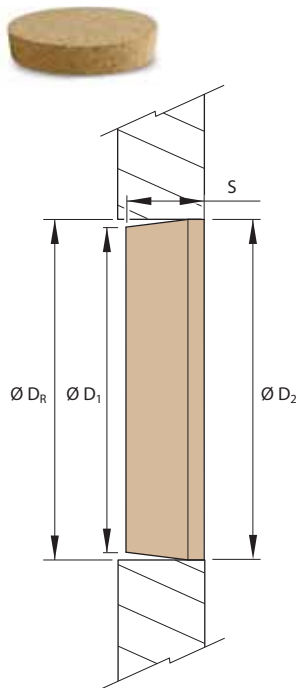



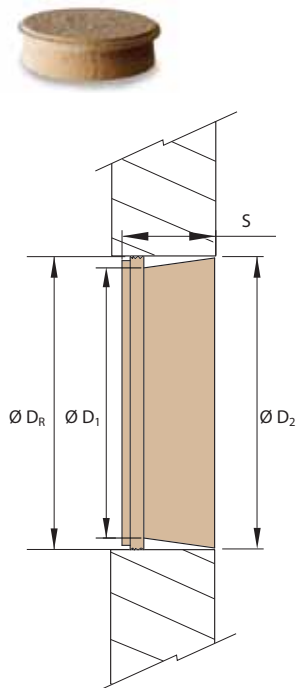

Injection holes can be closed quickly and easily with sealing corks. In the central issue sealing corks are used in combination with hard materials such as OSB, hardboard and gypsum plasterboard. Because of its conical shape, the sealing cork is fast and easy to implement and with a few handles the injection hole is closed flush. Low drilling tolerances are compensated by the conical shape. The sealing cork is valid generally as airtight and splash-watertight and eases the further processing because it can be plastered-over immediately.





## Sealing plug made of wood fibre

Injection holes in soft wood fibre materials can quickly and safely be closed with the sealing plug. Its conical shape facilitates the insertion of the plug and ensures permanent and reliable anchorage. Due to the conical shape even low drilling tolerances are compensated. The sealing plug is made of homogeneous and impregnated wood fibre and provides immediate protection against the weather. The use of the sealing plug made of wood fibre ensures a clean appearance and facilitates the further processing as it can be plastered-over directly.



	Ø Drill hole [D <sub>R</sub> ]	Ø D <sub>1</sub> / D <sub>2</sub>	Thickness S	Item no.
	26...32 mm	26 / 33 mm	25 mm	3626
	35...39 mm	35 / 40 mm	25 mm	3838
	52...54 mm	51 / 55 mm	25 mm	8837
	64...67 mm	64 / 68 mm	25 mm	2018
	78...83 mm	78 / 83 mm	25 mm	5818
	84...87 mm	84 / 88 mm	25 mm	2208
	105...108 mm	105 / 109 mm	25 mm	1948
	120...122,5 mm	120 / 123,5 mm	25 mm	4671

	Ø Drill hole [D <sub>R</sub> ]	Ø D <sub>1</sub> / D <sub>2</sub>	Thickness S	Item no.
	104...108 mm	102 / 109 mm	34 mm	8950
	120...122 mm	112 / 120 mm	34 mm	8951

Suitable hole saws for all common board materials can also be found in our product range.

